










EASY POWER L E

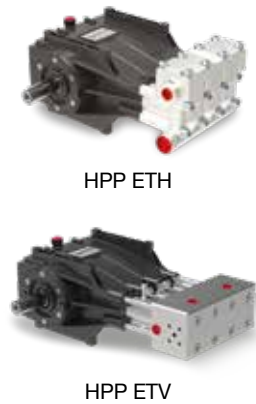

- Motori asincroni trifase 30 kW, dotati di giunto elastico
- Pannello di controllo con avviamento stella-triangolo e comandi in bassa tensione (24 V)
- Robusto telaio tubolare verniciato con trattamento anticorrosione
- Impugnature ergonomiche per agevolare la manovrabilità
- Pannelli di rivestimento in acciaio inox AISI 304
- Pratici alloggiamenti per pistola e lancia
- 4 ruote schiumate Ø 350mm "all-road" con cuscinetti a rulli
- Quadro comandi con interruttore generale, pulsanti di accensione e spegnimento, stop di emergenza, contattore, telerruttore con relè termico per la protezione del motore
- Aspirazione acqua diretta
- Manometro DN 63 in acciaio inox con glicerina
- Valvola unloader in acciaio inox a rilascio di pressione (ripristino al 50% della pressione impostata) ed EASY START
- Filtro acqua 100 mesh con cartuccia facilmente sostituibile
- Sicurezza mancanza acqua, sovrappressione, sovratemperatura

- Asynchronous three-phase motors 30 kW, with flexible motor-pump coupling joint
- Industrial low voltage (24 V) control panel with star-delta starter
- Sturdy painted tubular frame with anti-corrosion treatment
- Ergonomic grips for easy maneuverability
- AISI 304 stainless steel coated panels
- Practical housing for gun and lance
- Ø 350mm "all-road" foamed wheels with roller bearings
- Control panel with main switch, on/off buttons, emergency stop, hour counter, contactor with thermic relay for motor protection
- Direct water suction
- S/S DN 63 pressure gauge with glycerin
- Stainless steel Unloader valve with pressure release system (reset at 50% of set pressure) and EASY START system
- 100 mesh water filter with easily replaceable cartridge
- Safety in case of lack of water, overpressure, overtemperature

Modello Model	Pompa Pump	RPM								
			A	Ph-V-Hz			l/min	bar		HP
EASY POWER L E 30/500	HPP ETH	1450	63	3-400-50	30	500	40,0	30,0	280	
EASY POWER L E 38/400	HPP ETH				38	400				
EASY POWER L E 13/1000	HPP ETV	1750			3-440-60	13				1000
EASY POWER L E 18/800	HPP ETV					18				800